


VLo Nexxa-12 Castellated System

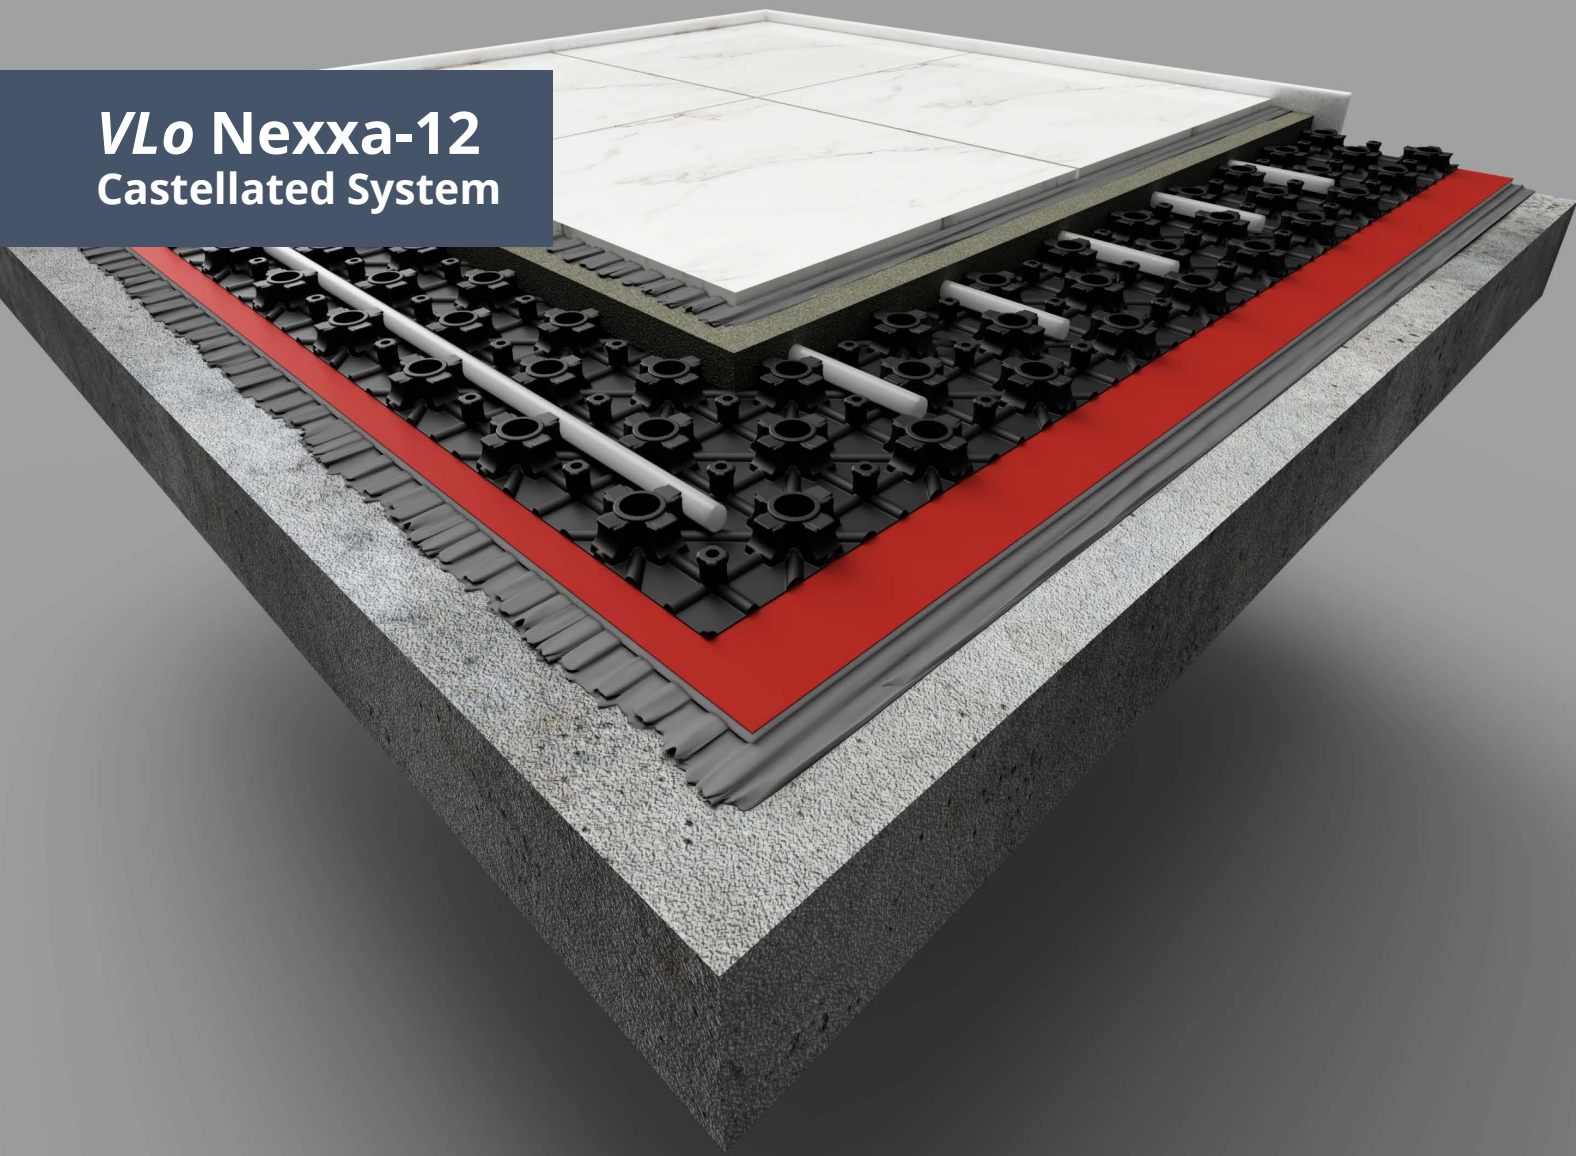

Easy installation

Made from an environmentally friendly and recyclable polystyrene that can be installed easily and around existing objects.

For all floor finishes

Suitable to be laid directly under all types of flooring and over existing insulated flooring.

* The subfloor must be pre-insulated unless it is an intermediate floor.

Excellent thermal properties

Excellent heat output when using low water temperatures alongside rapid response times to heating demand.

Low surface finish

22 mm floor height makes it ideal for retrofit installations and new build projects.



Overview


Warmup Nexxa-12 is a lightweight and flexible self-adhesive underfloor heating installation system. Developed to secure 12 mm pipe for even temperature distribution, the system can be fitted by a single installer and allows for lateral and diagonal pipe spacing.

The rigid and compact design ensures a low floor finish, making it ideal for retrofit or new home builds. Suitable to be laid below all flooring types, the panels require no overboarding whilst covering irregular surfaces better thanks to its flexibility.

Made from an environmentally friendly polystyrene that can be easily recycled in a carbon neutral factory, the panel can be cut to size and placed around existing obstacles due to its regular pipe spacing design. The panels are inter-locked to create a continuous layer across the floor ensuring a seamless flow of heat.

Typical Floor Build-Up

All floor finishes

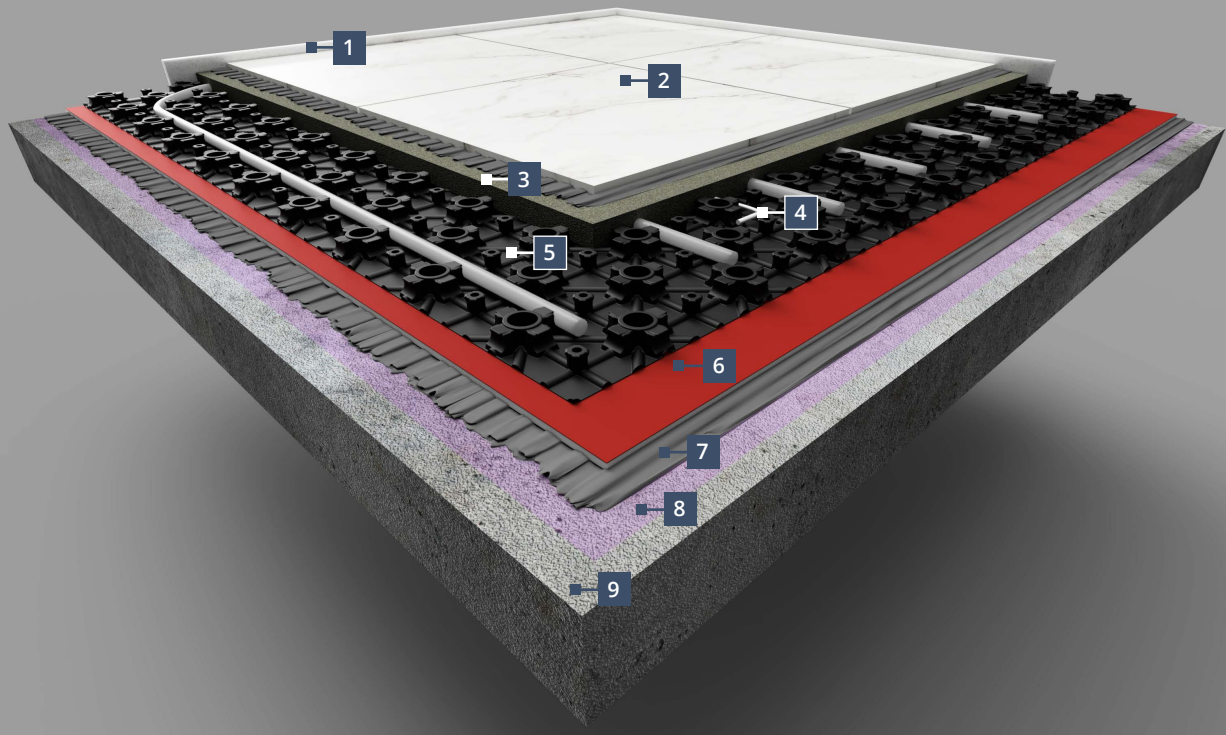

- 1 Warmup perimeter strip**

- 2 Floor finish**

- 3 22 mm levelling compound**
The 22 mm layer is measured from the base of the membrane. Levelling compound used must be compatible with plastic underlayments such as Nexxa-12. The levelling compound must be applied as a single layer.

- 4 Floor sensor**
Tab tape the sensor to the membrane. Do not tape over the sensor tip!

- 5 Nexxa-12 membrane**

- 6 Warmup Ultralight (Optional)**
Adding Warmup Ultralight below the membrane can help improve the response time of the system, particularly when installing over screed or concrete.

- 7 Flexible tile adhesive (Optional)**
Required if installing Warmup Ultralight

- 8 Warmup primer**
Refer to tile adhesive manufacturers instructions for priming requirements

- 9 Subfloor with a surface regularity of SR2***

* If installing the optional Warmup Ultralight, refer to its installation manual for its subfloor requirements.

Technical Specifications

Product Code	RNX-PANEL
Dimensions	16 x 650 x 1050 mm
Active Area	0.6 m ²
Double Up / Interlock On Pallet	Yes
Self-Adhesive	Yes
Pipe Spacing Increments	Immediate: 50mm Diagonal: 43 mm / 70mm
Pipe Orientation	0° / 90° / 45° / - 45°
Pipe Bend Radius	75 mm
Single Row Stagger	Yes (Remove/crush castellation first)
Supported Pipe Diameters	10 - 12 mm
Cutable	Yes

System Performance

k _H Value - W/m ² K													
Resistance of Floor Covering, tog	0.00	0.25	0.50	0.75	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00
100mm Pipe Centres	8.56	6.95	5.85	5.05	4.44	3.96	3.58	3.26	2.99	2.77	2.57	2.41	2.26
150mm Pipe Centres	7.15	5.91	5.05	4.41	3.91	3.52	3.21	2.94	2.72	2.53	2.36	2.21	2.09

q = Specific Heat Output, W/m²	k_H = System Performance Factor, W/m²K
T_{water} = Mean water Temperature	T_{air} = Room Air Temperature

Using the system k_H value to calculate the system heat output: $q = k_H \times (T_{water} - T_{air})$

Example:

The heat output through an 18mm thick, ≈ 1.25 tog timber floor, over Nexxa-12 fitted with pipe at 150mm centres, in a 21°C room heated with 40°C is;

$$q = 3.52 \times (40 - 21) = 3.52 \times 19 = 67 \text{ W/m}^2$$

Alternatively, using the system k_H value to calculate the required water temperature, knowing the required heat output: $T_{water} = (q / k_H) + T_{air}$

Example:

The water temperature required to produce a heat output of 55W/m², through a 3mm thick ≈ 0.25 tog LVT floor finish, over Nexxa-12 fitted with pipe at 100mm centres, in a 22°C room is;

$$T_{water} = (55 / 6.95) + 22 = 7.9 + 22 \approx 30^\circ\text{C}$$

Components




Warmup Primer

A ready to use, bond enhancing and solvent-free single component primer for the preparation of absorbent and non-absorbent floors and walls with or without surface heating.



PE-RT Pipe

Warmup PE-RT (Polyethylene of Raised Temperature Resistance) pipe. The pipe guarantees leak free performance with a smooth internal structure for improved flow, reduced pressure loss and deposit formation.



Warmup Ultralight (Optional)

Adding Warmup Ultralight below the membrane can help improve the response time of the system, particularly when installing over screed or concrete.

Contact

Warmup plc

www.warmup.co.uk **T:** 0345 345 2288
uk@warmup.com **F:** 0345 345 2299

Warmup plc ■ 704 Tudor Estate ■ Abbey Road ■ London ■ NW10 7UW ■ UK

Warmup GmbH ■ Ottostraße 3 ■ 27793 Wildeshausen ■ DE