

WHS-M-S3-VALVES

Overview

The WHS-M-S3-VALVES kit allow for the manifold on your underfloor heating system to easily be isolated from the primary circuit.

The kit has been specified to fit the WHS-M-S3-XX manifold range when equipped either with or with out the WHS-M-S3-MIX mixing unit.


With the WHS-M-S3-VALVES isolated, the manifold can

be filled, drained, pressure tested etc, without affting the primary circuit.

The 1" male to 22mm compression fitting allows for the connection of a common primary pipework size.

Body manufactured from nickle plated DZR brass.

WHS-M-S3-VALVES

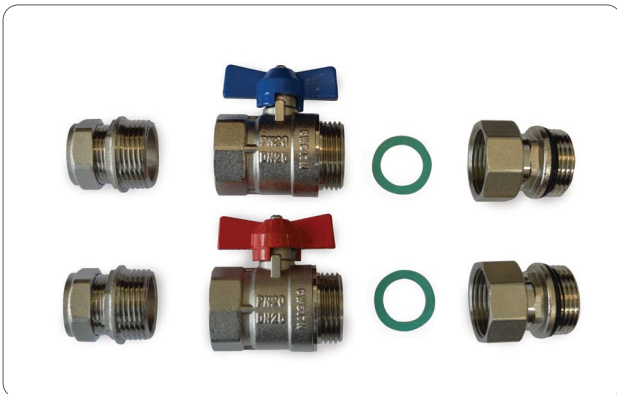

VALVES - TECHNICAL SPECIFICATIONS

MATERIAL	Nickle Plated Brass
SEAL	Fiber gasket
CONNECTION	1" to 1" Compression Union 1" male to female isolator 1" Male to 22mm Compression



Hydronic
Heating System

0345 345 2288

uk@warmup.com
www.warmup.co.uk

Warmup[®]

The world's best-selling floor heating brand™